

ASSEMBLY
INSTRUCTIONS
FOR WALD BASKET
PART Nos. 124, 135, 137, 139 & 151

FRONT BASKET

EXTENDED HANDLEBAR CLAMPS

- Allows clearance for shifters, brake levers & cables.
- For mounting to 7/8" & 1" diameter handlebars.

TWO LOWER LEG MOUNTING HOLES

- Large hole for front axle mounting.
- Small hole allows your bicycle dealer to mount to eyelet on several forks with quick-release front hubs.




Assembly
Instructions
Inside


© 2009 Wald LLC
Made in the U.S.A.

ASSEMBLY INSTRUCTIONS

Included Hardware :

- 2 Long Screws
- 2 Short Screws
- 2 Square Nuts
- 2 Hex Nuts

1. Attach top of leg (Marked "WALD") to leg mounting brackets on bottom of basket with short screws & hex nuts. Loosely tighten.
 2. Hook basket clamps  over handlebar on each side of stem. (If clamping onto 7/8" diameter handlebar, insert rubber spacer strips between handlebar & clamps). Assemble with long screws & square nuts. Loosely tighten.
 3. When mounting basket legs to axle, install one leg at a time.
 - A. Remove axle nut from one side of wheel.
 - B. Place axle mounting hole (larger hole) on axle.
 - C. Replace axle nut & tighten.
 - D. Repeat steps 3A thru 3C for other side.
 - E. Be sure wheel is aligned properly in fork. If not, loosen axle nut(s), readjust & tighten.
- Note** : If bicycle has a quick release front hub see your bicycle dealer for attachment screws & proper mounting.
4. Once legs are installed, position handlebar clamps so that the bottom of the basket does not rub tire or fender. Top of basket should be fairly level.
 5. Completely tighten all screws & nuts.
Failure to tighten basket screws & nuts or wheel axle nuts, failure to have wheel quick-release mechanism properly adjusted, could result in loss of control & possible injury. Please consult a bicycle dealer or your bicycle owner's manual for applicable tightening/adjusting requirements.

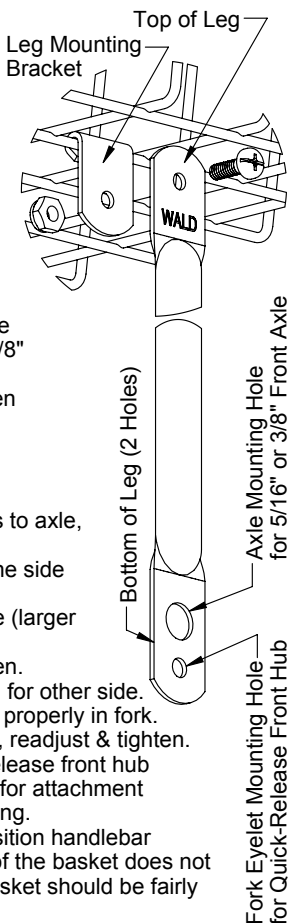

WARNING!

- **DO NOT** overload basket. Overloading basket may cause difficulty in steering and/or loss of bicycle control which could result in injury.
- **DO NOT** bend legs or leg mounting tabs.
- **DO NOT** mount legs to the inside of the bicycle's front fork blades. Mount only to the outside of the bicycle's front fork blades.
- **DO NOT** assemble a quick-release front hub through leg holes. The legs are to be mounted to bolt on front axles or to fork eyelets.
- **DO NOT** use on bicycles with a carbon fiber front fork or handlebar.
- **DO NOT** use on bicycles with a front suspension or springer fork.